

GT NETWORK KABINET



GT NETWORK free standing rack cabinets offers the most ideal solutions at the offices and system rooms in the areas of cabling and server installations. The cabinets created in a highly strong and robust structure are unrivalled in their class thanks to their low costs, unique design of top class profile design and easy assembly features. We invite you to meet the top quality that **GT NETWORK** offers for your needs.

The **GT NETWORK** free standing cabinets meet your needs with the 600kg loading capacity, height options ranging between 12U to 42U, width options of 600mm and 800 mm and depth options of 600mm, 800mm and 1000mm.



The rich portfolio of **GT NETWORK** meets all the U needs in the desired infrastructure to be installed. The GT NETWORK series is offered with the availability to meet all the needs and areas of use with the wide accessories options and the most ideal use of U heights.

THE CHARACTERISTIC FEATURES OF GT NETWORK

- > Meets the demands perfectly
- > Loading capacity: 600 kgs
- > Height Options: 12U – 42U
- > Width Options: 600mm and 800mm
- > Depth Options: 600mm, 800mm and 1000mm
- > Three options to meet the needs
- > Flatpack option
- > Easy assembly with the special design
- > plastic cable entry on the top and sliding cable entry on the bottom
- > Removable, openable, lockable side doors
- > Removable and fixable front wheels with breaks.
- > Max. load capacity of castors is 600 kgs/each

GT NETWORK The Installation Rails of GT NETWORK free standing cabinets are adjustable through the cabinet depth. **GT NETWORK** series cabinets offer user-friendly and time-saving solutions with the widest accessories range.

Thanks to its Flatpack option, the **GT NETWORK** free standing cabinets take less space in the warehouse and transport and are cost-effective. With the specially designed structure, the cabinets can be assembled and unassembled easily. Simple tools will be enough to assemble the whole cabinet.

The **GT NETWORK** free standing racks will attract you with the color options of new RAL 9005 Smooth Black and RAL 7035 Smooth Light Grey. For different color needs, please contact with our sales team.





The standard front door model for 600mm wide **GT NETWORK** free standing cabinets is the full size glass door with metal frame. The front glass door is 4mm tempered, smoke colored, grinded and highly resistant against breaking. The front door has a lock module for security reasons. The specially designed metal frame adds an aesthetical and decorative appearance on the cabinet besides its strength. The locking mechanism is handle-locking type. The colorful PVC strip located on the metal frame is the complimentary of the whole aesthetic design. The front door with spring loaded hinge system provides ease at the installation and use as it's changeable on the desired direction of opening; removable and installable without the need of any tool.

The standard rear door model for **GT NETWORK** free standing rack cabinets is solid metal door. It is easy to remove especially during relocation, installation and maintenance of the cabinet and system inside. The easily removable rear doors have the barrel locking mechanism.



The standard roof model of **GT NETWORK** cabinets has a highly modern structure with the straight vented surface and PVC corners



20-40 °C operating with color changing function, Mirsan Thermometer tapes are sticking to internal side of glass door, where need of tracing the internal temperature inside the cabinet, mainly used at wall cabinets where strict temperature measurements are not needed (-10/+50 °C operating function, double lithium battery, 2 years life Mirsan Digital thermometers are supplied integrated on decorative **GT NETWORK** cabinets.





GTN W=800mm free standing cabinets have the maximum strength with the side brackets and extra cube omega support points.



Thanks to the 130° openable front and rear doors of GTN free standing cabinets, installations and interventions are much easier now.



The rich portfolio of **GT NETWORK** meets all the U needs in the desired infrastructure to be installed. The GT NETWORK series is offered with the availability to meet all the needs and areas of use with the wide accessories options and the most ideal use of U heights.

THE CHARACTERISTIC FEATURES OF GT NETWORK

- >Meets the demands perfectly
- >Loading capacity: 600 kgs
- >Height Options: 12U – 42U
- >Width Option: 600mm
- >Depth Option: 600mm
- >Flatpack option
- >Easy assembly with the special design
- >plastic cable entry on the top and sliding cable entry on the bottom
- >Removable, openable, lockable side doors
- >Removable and fixable front wheels with breaks.
- >Max. load capacity of castors is 600 kgs/each






W-600 D-600 GTN Dikili Tip Network															
Product Code	Product Description	h Measurement (U)	Product Dimensions WxDxH (mm)	Width: Between Rails (mm)	Depth: Between Rails (mm)	h Measurement (mm)	Package Dimensions WxDxH (mm)	Number in the Package (pcs)	Product Net Weight (kg)	Product Gross Weight (kg)	Number on Pallet (pcs)	Pallet Dimensions WxDxH (mm)	Pallet Weight (kg)	Height with Leveling feet (mm)	Height with Caster Group (mm)
MR.GTN12U66.XX	12U W=600mm D=600mm Dikili tip NETWORK Kabinet	12U	600x600x670	600	600	492	600x600x690	1	38	40	2	600x600x790	80	990	990
MR.GTN16U66.XX	16U W=600mm D=600mm Dikili tip NETWORK Kabinet	16U	600x600x848	600	600	670	600x600x868	1	46	48	2	600x600x968	96	1068	1068
MR.GTN20U66.XX	20U W=600mm D=600mm Dikili tip NETWORK Kabinet	20U	600x600x1026	600	600	848	600x600x1046	1	54	56	2	600x600x1146	112	1146	1146
MR.GTN22U66.XX	22U W=600mm D=600mm Dikili tip NETWORK Kabinet	22U	600x600x1115	600	600	937	600x600x1135	1	58	60	2	600x600x1235	120	1235	1235
MR.GTN26U66.XX	26U W=600mm D=600mm Dikili tip NETWORK Kabinet	26U	600x600x1292	600	600	1115	600x600x1312	1	65	67	1	600x600x1412	69	1412	1412
MR.GTN32U66.XX	32U W=600mm D=600mm Dikili tip NETWORK Kabinet	32U	600x600x1559	600	600	1381	600x600x1579	1	77	79	1	600x600x1679	89	1679	1679
MR.GTN36U66.XX	36U W=600mm D=600mm Dikili tip NETWORK Kabinet	36U	600x600x1737	600	600	1559	600x600x1757	1	85	87	1	600x600x1857	97	1857	1857
MR.GTN42U66.XX	42U W=600mm D=600mm Dikili tip NETWORK Kabinet	42U	600x600x2004	600	600	1826	600x600x2024	1	97	102	1	600x600x2124	110	2124	2124

xx= Color Code, 22 means Light Grey Ral 7035 and 11 means Black RAL 9005, the code is added by the customer at the order.


The door width to be selected should be selected among the door options with the related surface dimensions
When one of the door options is selected, it should be informed at the order width its selected surface

The number 0 from the door. Options stands for "doorless" The standart door options.

Front door=11, Side Door=8 Rear door=6

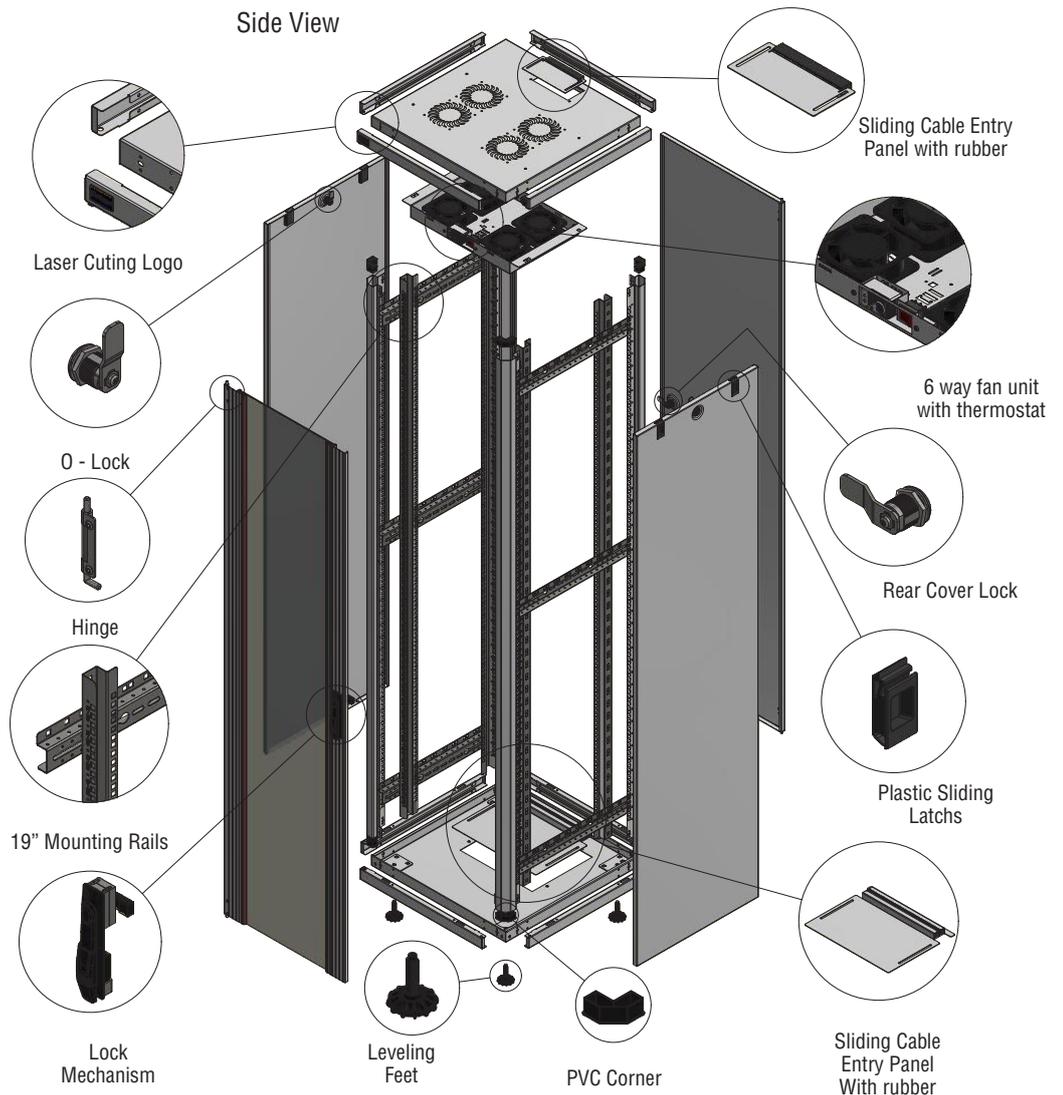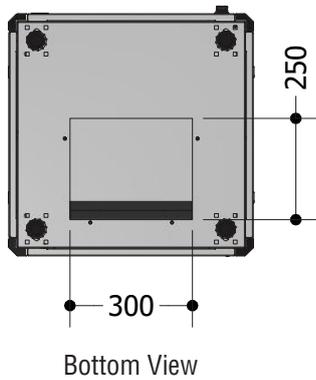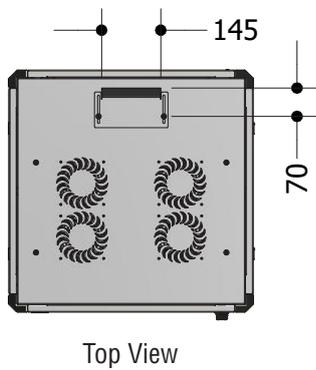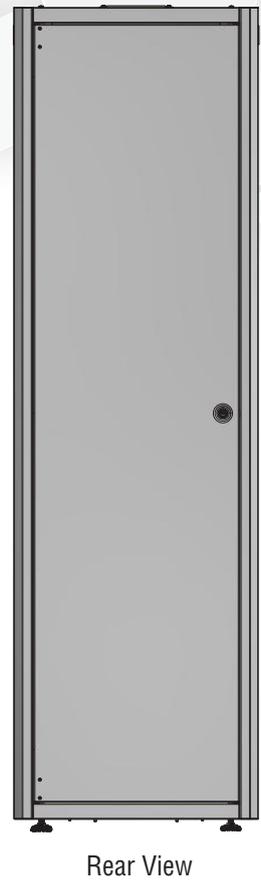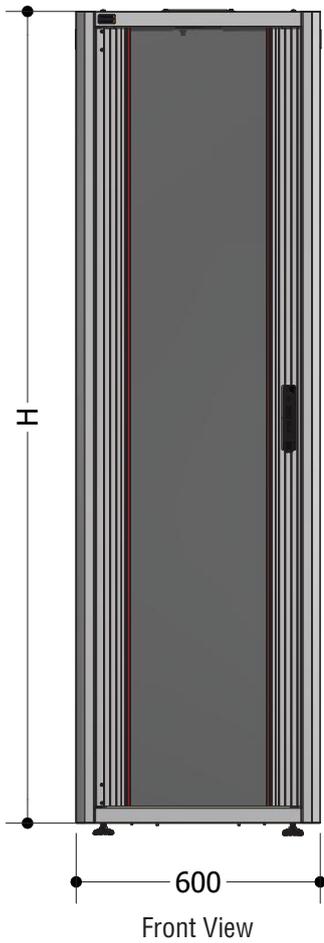

W=600 DOOR OPTIONS

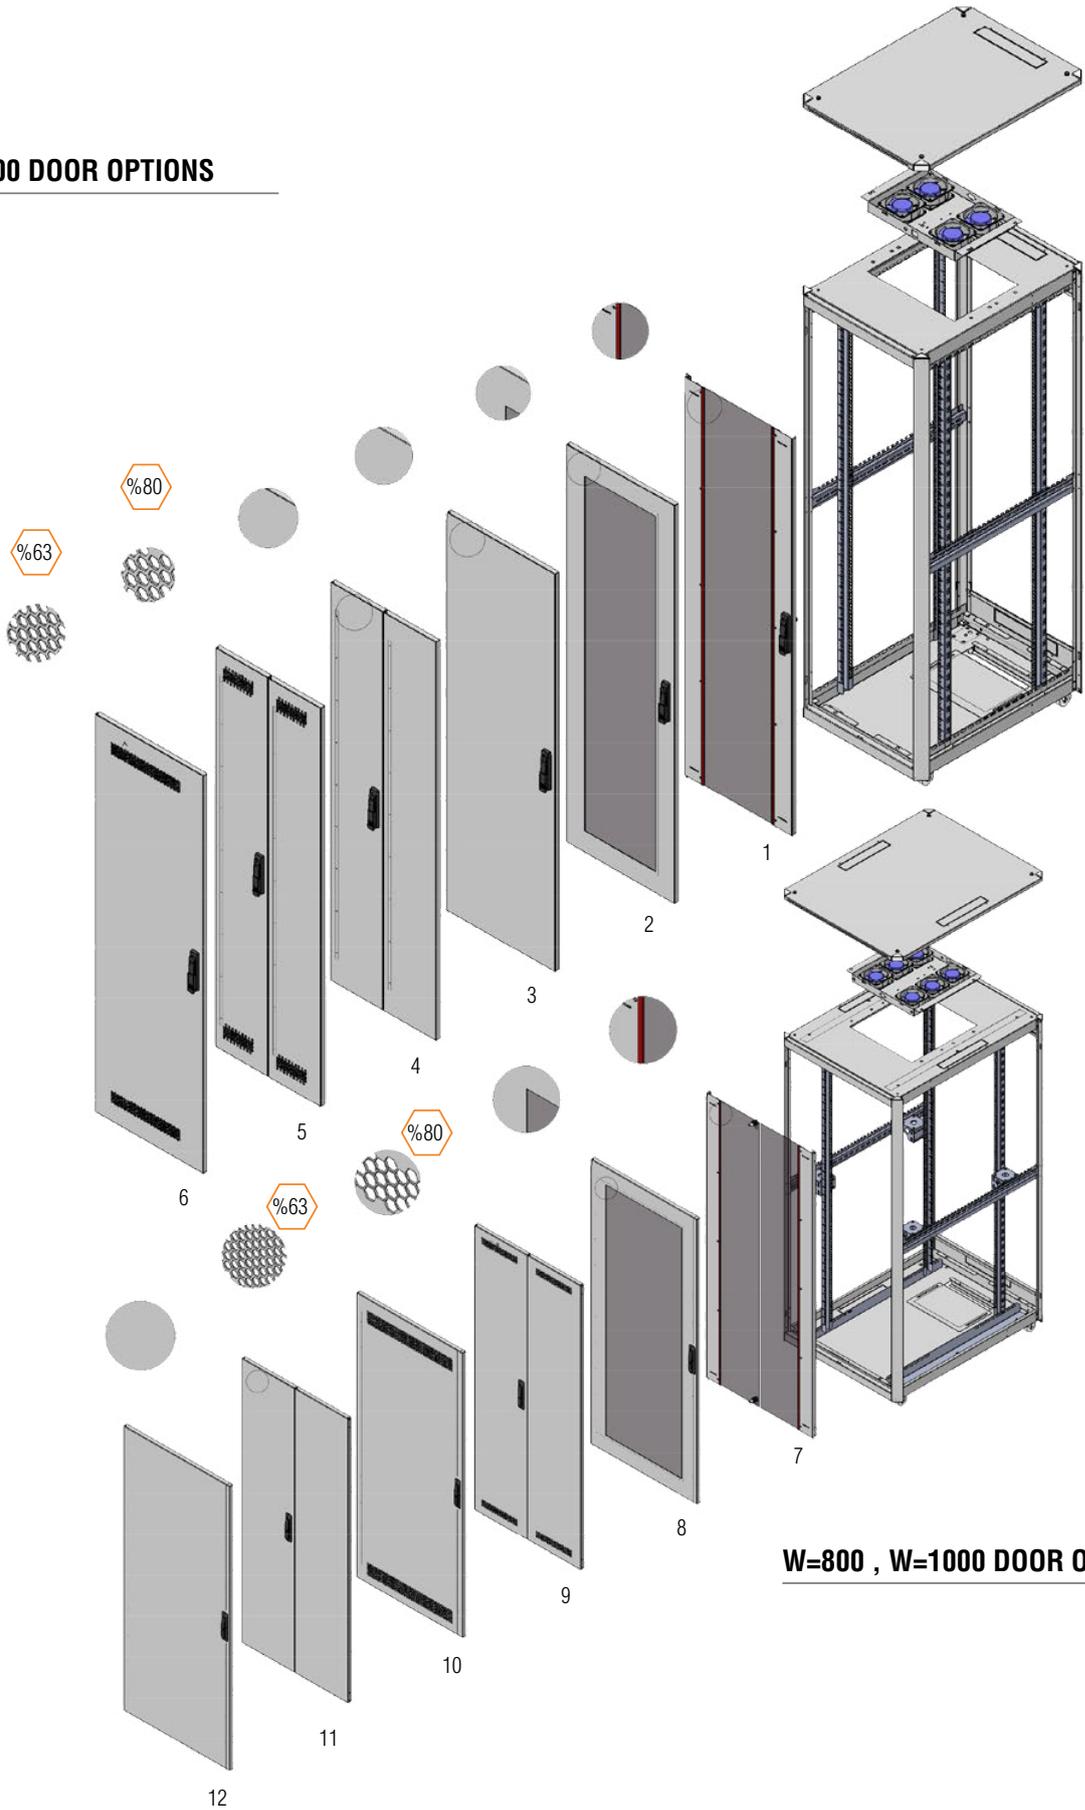

W=800 , W=1000 DOOR OPTIONS

600x800 GT NETWORK KABINET



The rich portfolio of **GT NETWORK** meets all the U needs in the desired infrastructure to be installed. The GT NETWORK series is offered with the availability to meet all the needs and areas of use with the wide accessories options and the most ideal use of U heights.

THE CHARACTERISTIC FEATURES OF **GT NETWORK**

- >Meets the demands perfectly
- >Loading capacity: 600 kgs
- >Height Options: 12U – 42U
- >Width Option: 600mm
- >Depth Option: 800mm
- >Flatpack option
- >Easy assembly with the special design
- >plastic cable entry on the top and sliding cable entry on the bottom
- >Removable, openable, lockable side doors
- >Removable and fixable front wheels with breaks.
- >Max. load capacity of castors is 600 kgs/each

W-600 D-800 GTN Dikili Tip Network




Product Code	Product Description	h Measurement (U)	Product Dimensions WxDxH (mm)	Width: Between Rails (mm)	Depth: Between Rails (mm)	h Measurement (mm)	Package Dimensions WxDxH (mm)	Number in the Package (pcs)	Product Net Weight (kg)	Product Gross Weight (kg)	Number on Pallet (pcs)	Pallet Dimensions WxDxH (mm)	Pallet Weight (kg)	Height with Leveling Feet (mm)	Height with Caster Group (mm)
MR.GTN12U68.XX	12U W=600mm D=800mm Free Standing NETWORK Kabinet	12U	600x800x670	600	800	1115	600x800x690	1	38	40	2	600x800x790	80	990	990
MR.GTN16U68.XX	16U W=600mm D=800mm Free Standing NETWORK Kabinet	16U	600x800x848	600	800	1292	600x800x868	1	46	48	2	600x800x968	96	1068	1068
MR.GTN20U68.XX	20U W=600mm D=800mm Free Standing NETWORK Kabinet	20U	600x800x1026	600	800	1559	600x800x1046	1	54	56	2	600x800x1146	112	1146	1146
MR.GTN22U68.XX	22U W=600mm D=800mm Free Standing NETWORK Kabinet	22U	600x800x1115	600	800	1737	600x800x1135	1	58	60	2	600x800x1235	120	1235	1235
MR.GTN26U68.XX	26U W=600mm D=800mm Free Standing NETWORK Kabinet	26U	600x800x1292	600	800	2004	600x800x1312	1	65	67	1	600x800x1412	69	1412	1412
MR.GTN32U68.XX	32U W=600mm D=800mm Free Standing NETWORK Kabinet	32U	600x800x1559	600	800	1381	600x800x1580	1	77	79	1	600x800x1680	89	1679	1679
MR.GTN36U68.XX	36U W=600mm D=800mm Free Standing NETWORK Kabinet	36U	600x800x1737	600	800	1559	600x800x1757	1	85	87	1	600x800x1857	97	1857	1857
MR.GTN42U68.XX	42U W=600mm D=800mm Free Standing NETWORK Kabinet	42U	600x800x2004	600	800	1826	600x800x2024	1	97	102	1	600x800x2124	110	2124	2124

xx= Color Code, 22 means Light Grey Ral 7035 and 11 means Black RAL 9005, the code is added by the customer at the order.

The door width to be selected should be selected among the door options with the related surface dimensions
When one of the door options is selected, it should be informed at the order width its selected surface

The number 0 from the door. Options stands for "doorless" The standart door options.

Front door=11, Side Door=8 Rear door=6

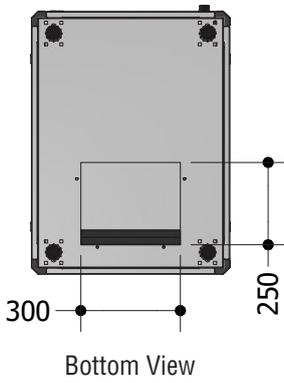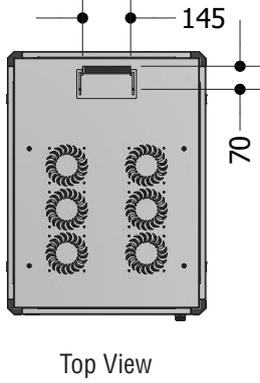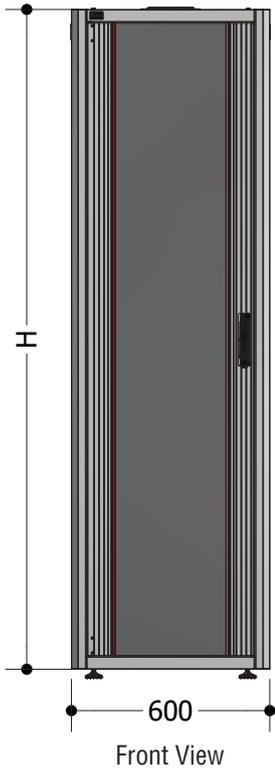

6 way fan unit with thermostat

Laser Cutting Logo

Sliding Cable Entry Panel with rubber

Rear Cover Lock

O - Lock

Plastic Sliding Latches

Hinge

19" Mounting Rails

Sliding Cable Entry Panel With rubber

Handle Locking Mechanism

Leveling Feet

PVC Corner



600x1000 GT NETWORK KABINET



The rich portfolio of **GT NETWORK** meets all the U needs in the desired infrastructure to be installed.

The GT NETWORK series is offered with the availability to meet all the needs and areas of use with the wide accessories options and the most ideal use of U heights.

THE CHARACTERISTIC FEATURES OF **GT NETWORK**

- >Meets the demands perfectly
- >Loading capacity: 600 kgs
- >Height Options: 22U – 42U
- >Width Option: 600mm
- >Depth Option: 1000mm
- >Flatpack option
- >Easy assembly with the special design
- >plastic cable entry on the top and sliding cable entry on the bottom
- >Removable, openable, lockable side doors
- >Removable and fixable front wheels with breaks.
- >Max. load capacity of castors is 600 kgs/each






W-600 D-1000 GTN Dikili Tip Network

Product Code	Product Description	h Measurement (U)	Product Dimensions WxDxH (mm)	Width: Between Rails (mm)	Depth: Between Rails (mm)	h Measurement (mm)	Package Dimensions WxDxH (mm)	Number in the Package (pcs)	Product Net Weight (kg)	Product Gross Weight (kg)	Number on Pallet (pcs)	Pallet Dimensions WxDxH (mm)	Pallet Weight (kg)	Height with Leveling Feet (mm)	Height with Castor Group (mm)
MR.GTN22U61.XX	22U W=600mm D=1000mm Free Standing NETWORK Kabinet	22U	600x1000x1115	600	1000	1115	620x1020x1135	1	58	60	2	600x1020x1235	120	1235	1235
MR.GTN26U61.XX	26U W=600mm D=1000mm Free Standing NETWORK Kabinet	26U	600x1000x1292	600	1000	1292	620x1020x1312	1	65	67	1	600x1020x1412	69	1412	1412
MR.GTN32U61.XX	32U W=600mm D=1000mm Free Standing NETWORK Kabinet	32U	600x100x1559	600	1000	1559	620x1020x1579	1	77	79	1	600x1020x1679	89	1679	1679
MR.GTN36U61.XX	36U W=600mm D=1000mm Free Standing NETWORK Kabinet	36U	600x100x1737	600	1000	1737	620x1020x1757	1	85	87	1	600x1020x1857	97	1857	1857
MR.GTN42U61.XX	42U W=600mm D=1000mm Free Standing NETWORK Kabinet	42U	600x100x2004	600	1000	2004	620x1020x2024	1	97	102	1	600x1020x2124	110	2124	2124


xx= Color Code, 22 means Light Grey Ral 7035 and 11 means Black RAL 9005, the code is added by the customer at the order.

The door width to be selected should be selected among the door options with the related surface dimensions
When one of the door options is selected, it should be informed at the order width its selected surface

The number 0 from the door. Options stands for "doorless" The standart door options.
Front door=11, Side Door=8 Rear door=6

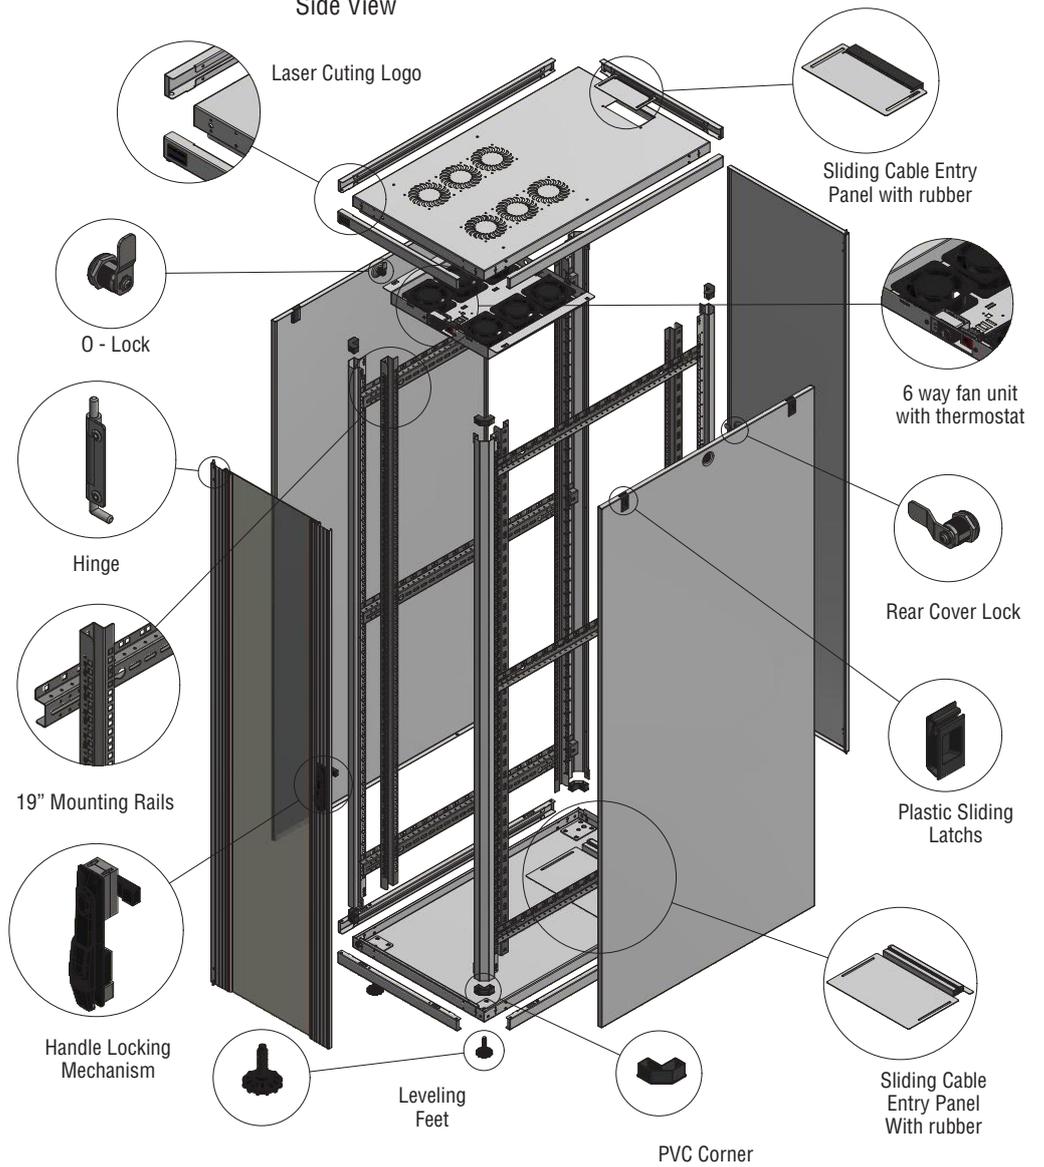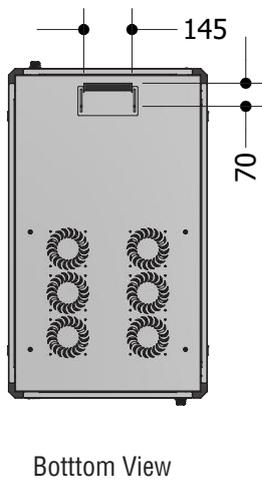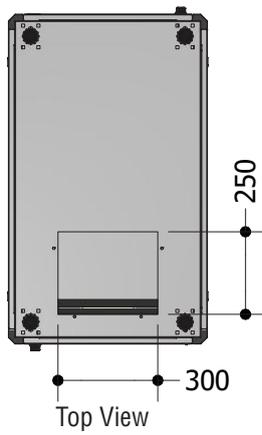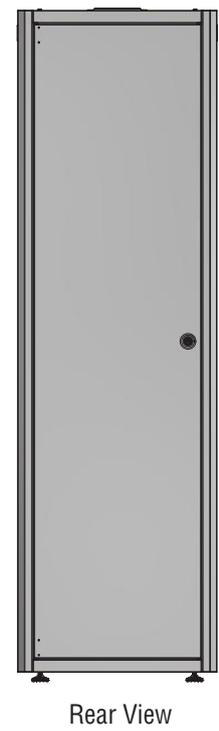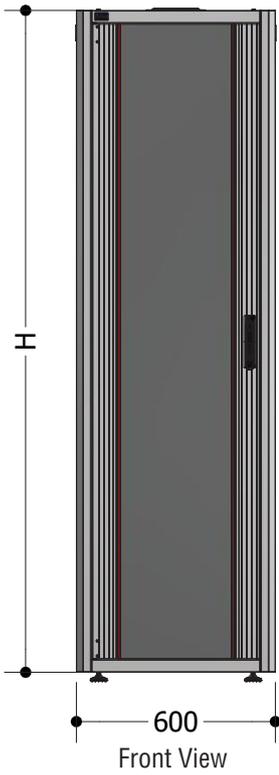

800x800 GT NETWORK KABINET

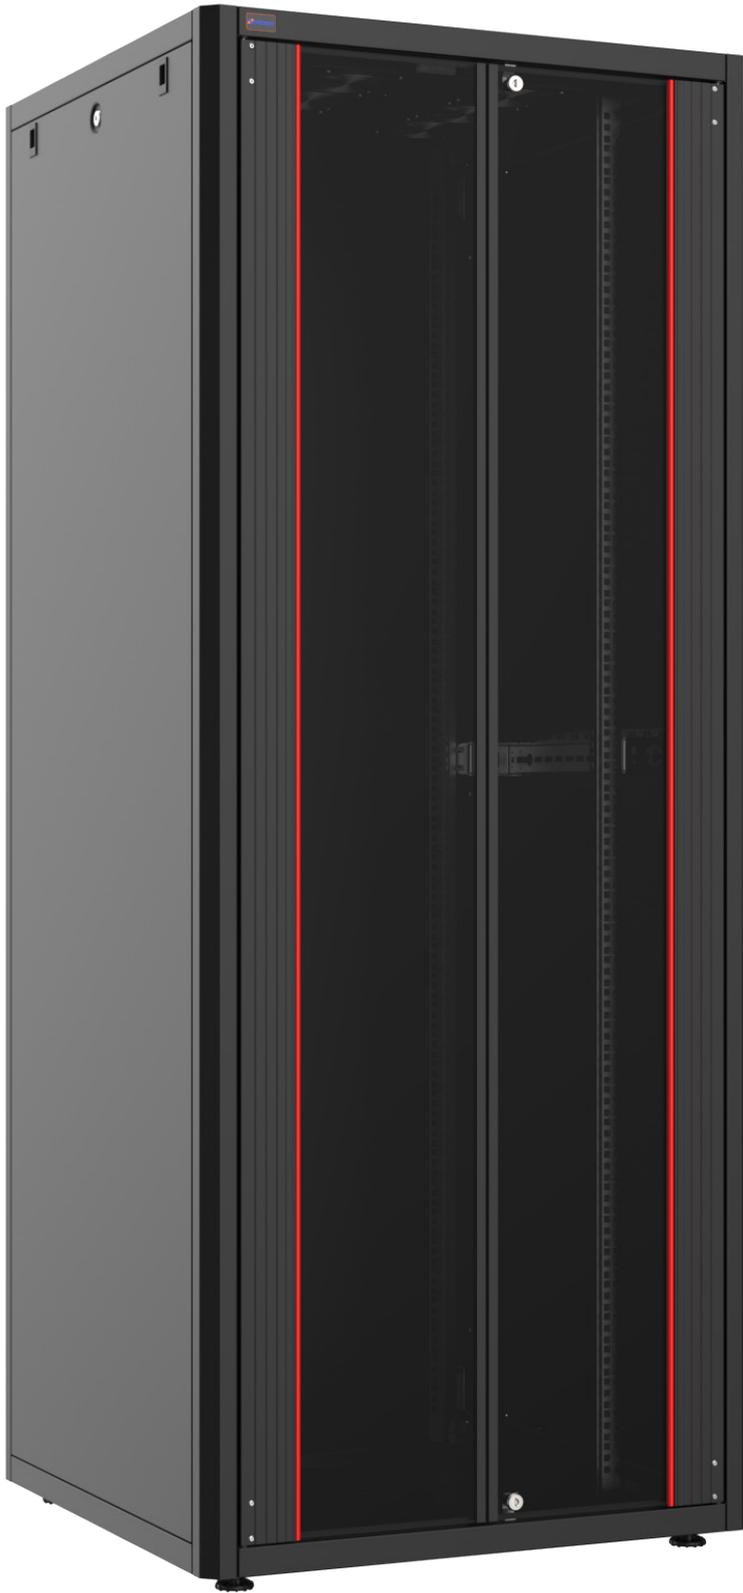

The rich portfolio of **GT NETWORK** meets all the U needs in the desired infrastructure to be installed. The GT NETWORK series is offered with the availability to meet all the needs and areas of use with the wide accessories options and the most ideal use of U heights.

THE CHARACTERISTIC FEATURES OF GT NETWORK

- >Meets the demands perfectly
- >Loading capacity: 600 kgs
- >Height Options: 32U – 42U
- >Width Option: 800mm
- >Depth Option: 800mm
- >Three options to meet the needs
- >Three options to meet the needs
- >Flatpack option
- >Easy assembly with the special design
- >plastic cable entry on the top and sliding cable entry on the bottom
- >Removable, openable, lockable side doors
- >Removable and fixable front wheels with breaks.
- >Max. load capacity of castors is 600 kgs/each





W-800 D-800 GTN Dikili Tip Network															
Product Code	Product Description	h Measurement (U)	Product Dimensions WxDxH (mm)	Width Between Rails	Depth Between Rails (mm)	h Measurement (mm)	Package Dimensions WxDxH (mm)	Number in the Package (pcs)	Product Net Weight (kg)	Product Gross Weight (kg)	Number on Pallet (pcs)	Pallet Dimensions WxDxH (mm)	Pallet Weight (kg)	Height with Leveling Feet (mm)	Height with Castor Group (mm)
MR.GTN32U88.XX	32U W=800mm D=800mm Dikili TIP NETWORK Kabinet	32U	800x800x1559	800	800	1559	820x820x1579	1	77	79	1	820x820x1679	89	1679	1679
MR.GTN36U88.XX	36U W=800mm D=800mm Dikili Tip NETWORK Kabinet	36U	800x800x1737	800	800	1737	820x820x1757	1	85	87	1	820x820x1857	97	1857	1857
MR.GTN42U88.XX	42U W=800mm D=800mm Dikili Tip NETWORK Kabinet	42U	800x800x2004	800	800	2004	820x820x2024	1	97	102	1	820x820x2124	110	2124	2124

xx= Color Code, 22 means Light Grey Ral 7035 and 11 means Black RAL 9005, the code is added by the customer at the order.


The door width to be selected should be selected among the door options with the related surface dimensions. When one of the door options is selected, it should be informed at the order with its selected surface

The number 0 from the door. Options stands for "doorless" The standart door options.

Front door=11, Side Door=8 Rear door=6

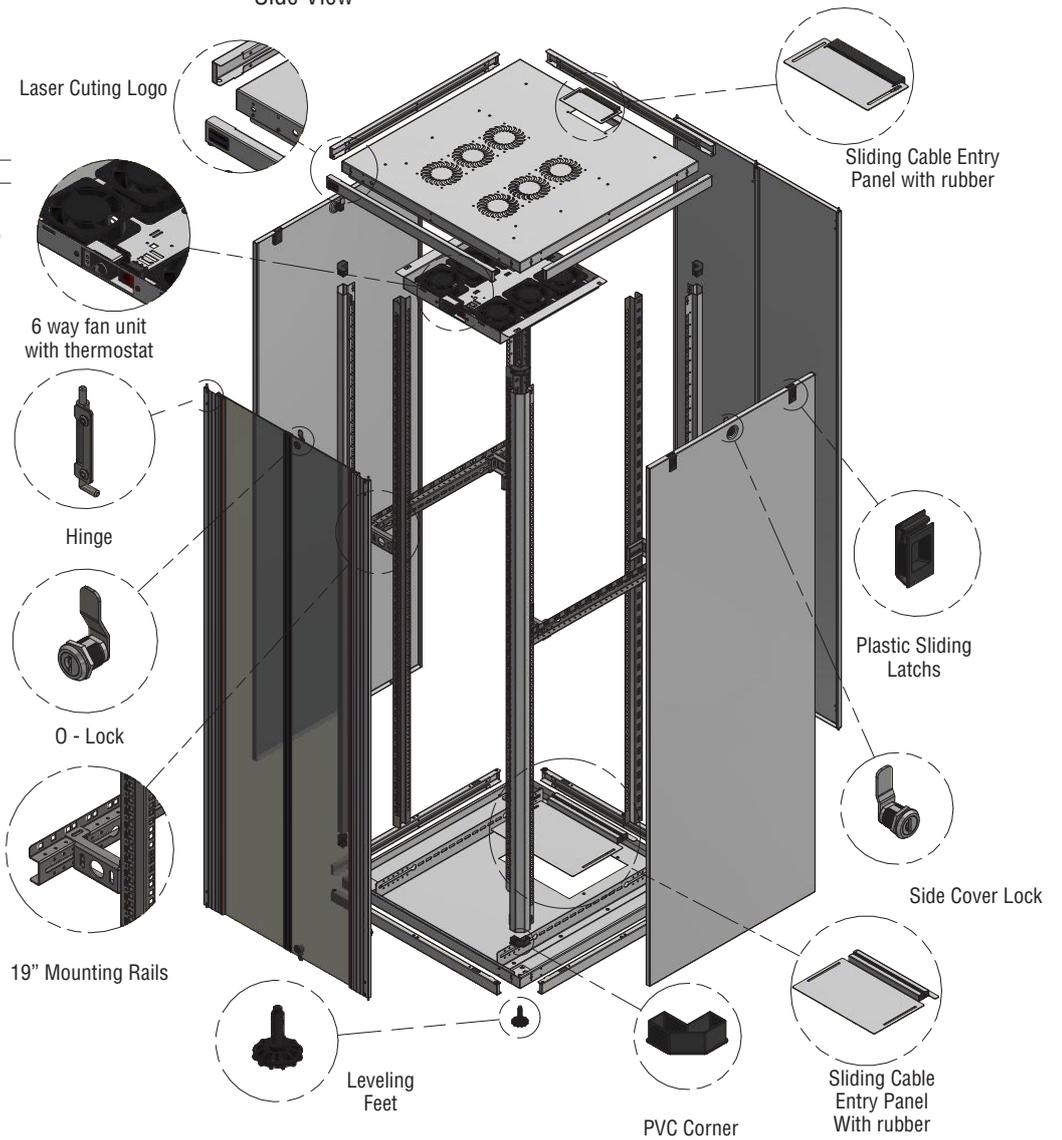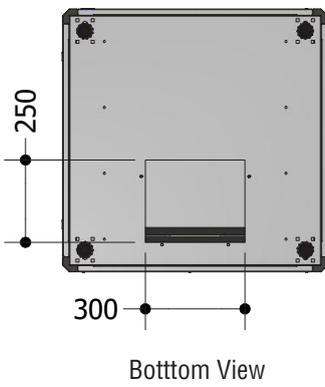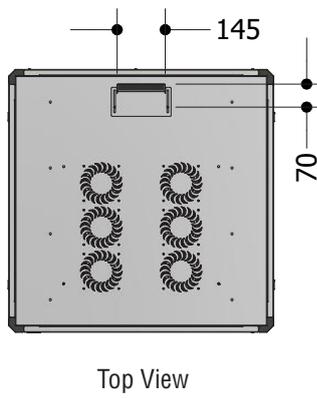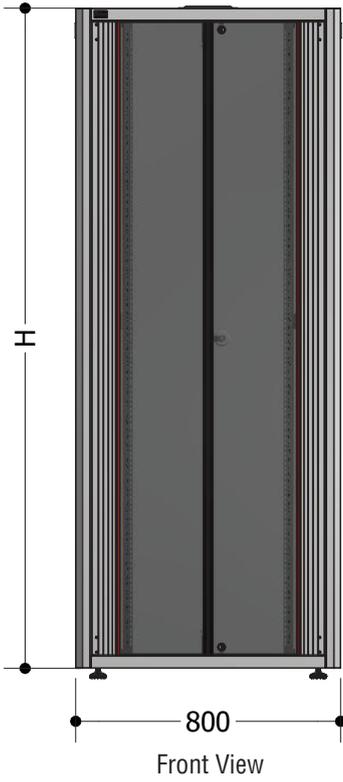

800x1000 GT NETWORK KABINET

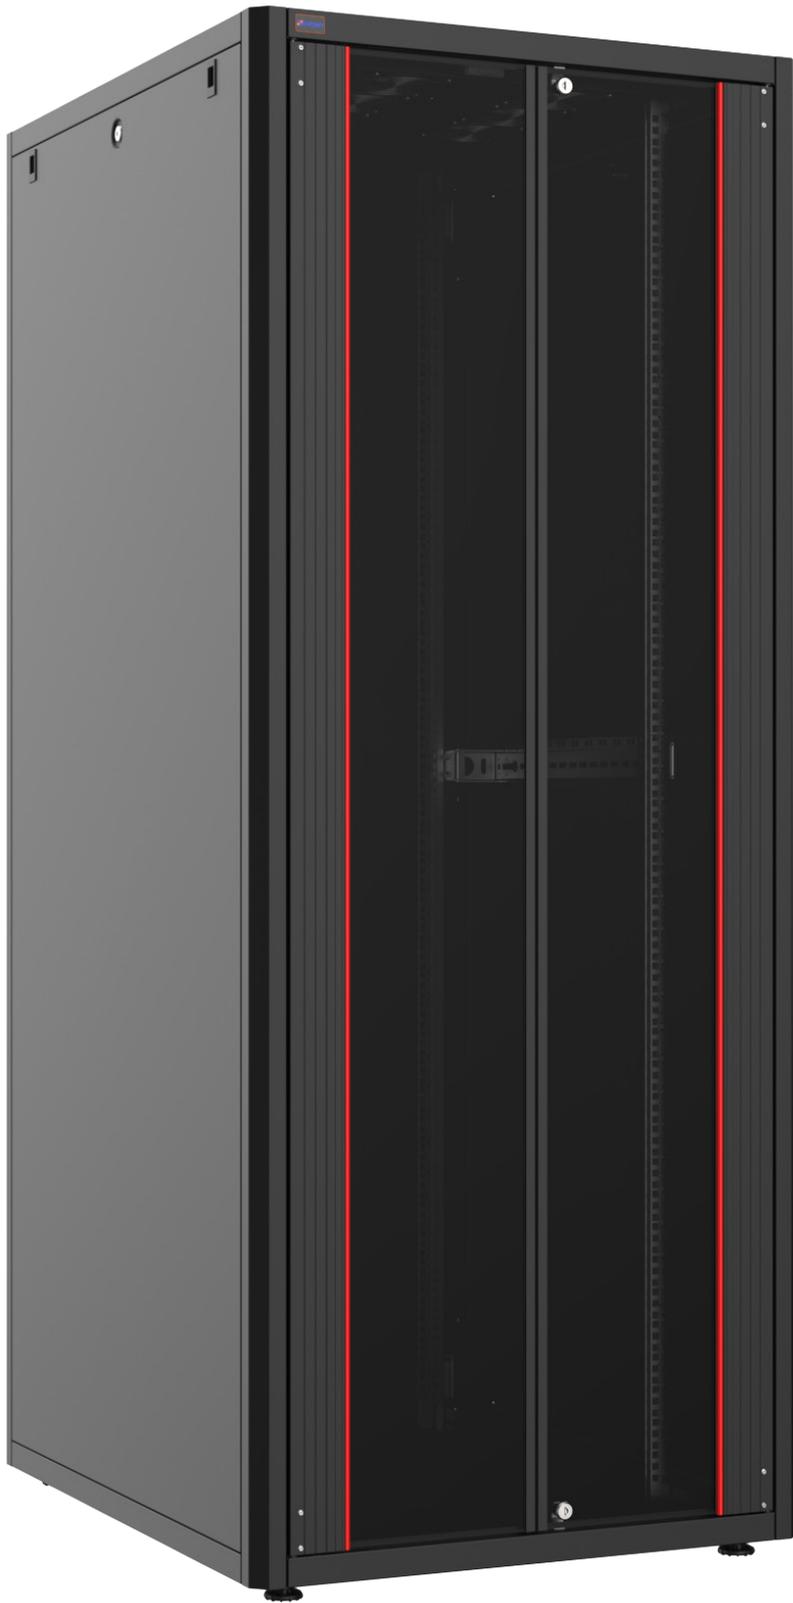

The rich portfolio of **GT NETWORK** meets all the U needs in the desired infrastructure to be installed. The GT NETWORK series is offered with the availability to meet all the needs and areas of use with the wide accessories options and the most ideal use of U heights.

THE CHARACTERISTIC FEATURES OF **GT NETWORK**

- >Meets the demands perfectly
- >Loading capacity: 600 kgs
- >Height Option: 42U
- >Width Option: 800mm
- >Depth Option: 1000mm
- >Three options to meet the needs
- >Three options to meet the needs
- >Flatpack option
- >Easy assembly with the special design
- >plastic cable entry on the top and sliding cable entry on the bottom
- >Removable, openable, lockable side doors
- >Removable and fixable front wheels with breaks.
- >Max. load capacity of castors is 600 kgs/each

W-800 D-1000 GTN Dikili Tip Network

Product Code	Product Description	h Measurement (U)	Product Dimensions WxDxH (mm)	Width: Between Rails (mm)	Depth: Between Rails (mm)	h Measurement (mm)	Package Dimensions WxDxH (mm)	Number in the Package (pcs)	Product Net Weight (kg)	Product Gross Weight (kg)	Number on Pallet (pcs)	Pallet Dimensions WxDxH (mm)	Pallet Weight (kg)	Height: with Leveling Feet (mm)	Height: with Caster Group (mm)
MR.GTN42U81.XX	42U W=800mm D=1000mm Dikili Tip NETWORK Kabinet	42U	800x1000x2004	800	1000	2004	820x1020x2020	1	97	102	1	920x1120x2020	110	2020	2020

xx= Color Code, 22 means Light Grey Ral 7035 and 11 means Black RAL 9005, the code is added by the customer at the order.

The door width to be selected should be selected among the door options with the related surface dimensions. When one of the door options is selected, it should be informed at the order with its selected surface

The number 0 from the door. Options stands for "doorless" The standart door options.

Front door=11, Side Door=8 Rear door=6

